


NT2192GK

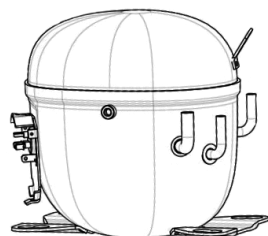

ENGINEERING CODE
923EA04

REFRIGERANT
R-404A

POWER SUPPLY
220-240 V 50 Hz

APPLICATION
LBP

MOTOR TYPE
CSCR

STANDARD
ASHRAE

COOLING CAPACITY
1080 W

EFFICIENCY
1.47 W/W



DATA

GENERAL DATA

Model	NT2192GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1 1/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	8.4 Ω at 25°C
Run Winding Resistance	1.9 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	35 A

MECHANICAL DATA

Displacement	22.37 cm ³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17.5 Kg

ELECTRICAL COMPONENTS

Start Capacitor	130-156 µf/250 V
CSR CSIR BOX	Yes
Overload Protection	MST26AHK-3261

EXTERNAL CHARACTERISTICS

Base Plate	UNI
------------	-----

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-23.3	1080	1.47	735	3.46	24.97

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	494	1.17	422	2.21	11.32
-35	664	1.36	489	2.45	15.28
-30	881	1.57	562	2.72	20.33
-25	1143	1.79	637	3.03	26.50
-20	1452	2.05	710	3.38	33.84
-15	1807	2.33	776	3.76	42.36
-10	2207	2.65	833	4.18	52.10

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	451	1.04	434	2.20	10.32
-35	615	1.20	510	2.50	14.12
-30	823	1.38	595	2.83	18.96
-25	1075	1.57	684	3.18	24.88
-20	1371	1.77	773	3.56	31.89
-15	1711	1.99	860	3.97	40.05
-10	2095	2.23	939	4.40	49.36


Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

PERFORMANCE CURVE**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	740	1.24	597	2.93	17.02
-25	981	1.40	700	3.32	22.66
-20	1265	1.57	805	3.74	29.35
-15	1590	1.75	910	4.17	37.13
-10	1957	1.94	1011	4.61	46.01

Test Condition: Liquid 32.2 °C, Return Gas 32.2 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

ENVELOPE

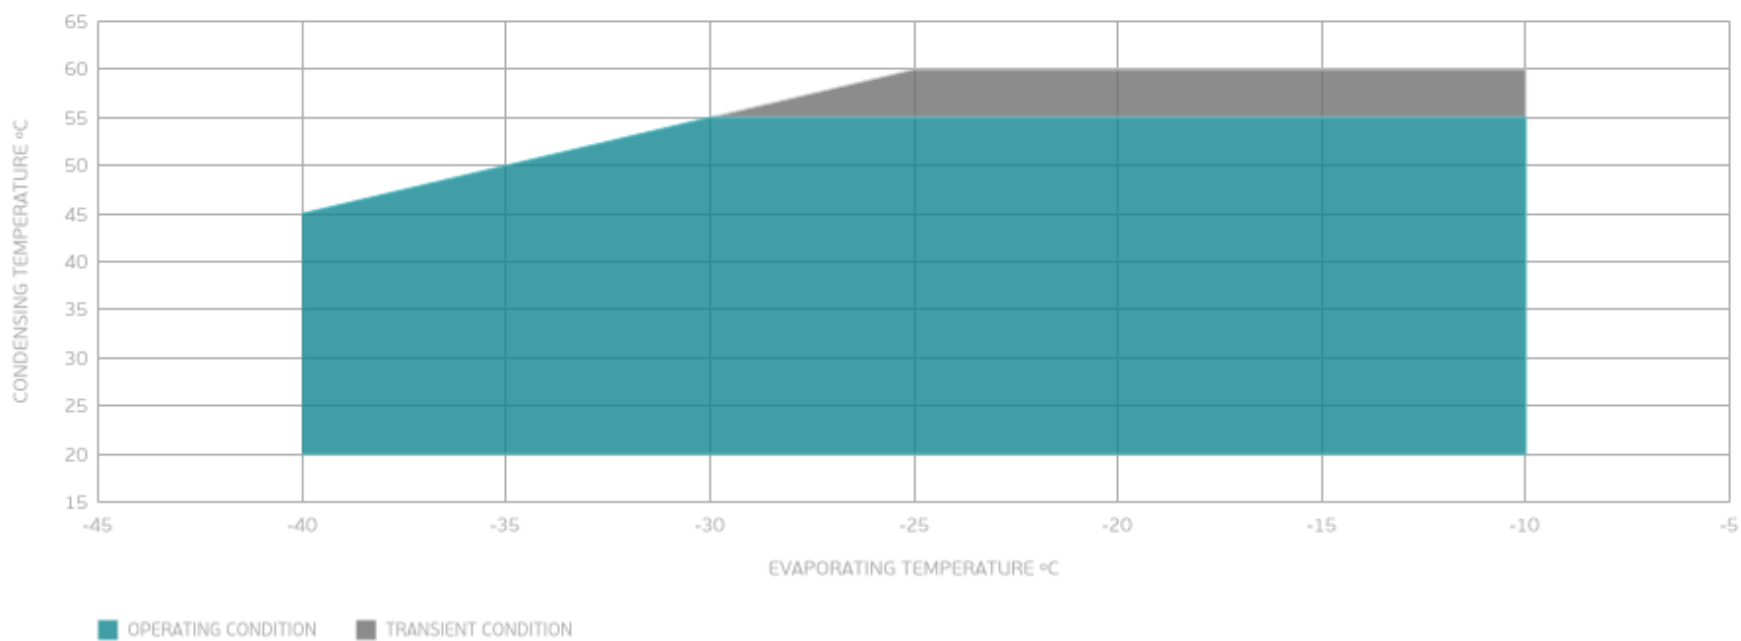

EXTERNAL DIMENSIONS

